

Landa Gun



Designed exclusively for Landa to meet the demands of the high pressure cleaning professional.



- **PSI:** 5000
- **GPM:** 10
- **Temperature:** 350°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 27.5 oz

Landa 5000 PSI

Part No.	Description
4-01212	Landa Gun
12-30203124	Repair Kit

Legacy AP1000 Trigger Gun



The World's most popular and easy to repair trigger gun!!!



- **PSI:** 4500
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 19 oz

AP1000

Part No.	Description
353010	AP1000
353010W	AP1000 Weep
109856	Unitized Valve
109857	Unitized Valve (Weep)
109858	Trigger Seal Kit

Power performance with comfort and durability.



- **PSI:** 4600
- **GPM:** 10
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 23 oz

Part No.	Description
353025	Model 2500
109950	Unitized Valve
109960	Trigger Seal Kit

Extra value!



- **PSI:** 4000
- **GPM:** 7
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 13.4 oz

AP740

Part No.	Description
353030	AP740
111266	Repair Kit
111279	Trigger Seal Kit

Linear Trigger Guns



Superior quality inline gun, especially well suited for high reach applications.



- **PSI:** 4000
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21.9 oz

Linear

Part No.	Description
353201	Linear 2 Gun
109797	Repair Kit-Linear 2 Gun



- **PSI:** 3000
- **GPM:** 7
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 14 oz

AP2000

Part No.	Description
353020	AP2000
109875	Trigger Seal Kit
109876	Valve Seat Kit

Iride Trigger Gun



- **PSI:** 4100
- **GPM:** 8
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 24 oz

Part No.	Description
353270	Iride
109950	Repair Kit
109960	Trigger Seal Kit

Giant Trigger Guns



The Original "Heavy weight".



- **PSI:** 5000
- **GPM:** 10
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 29.28 oz

21290C

Part No.	Description
81-21250	21290C - Brass Outlet
352250	21250B - SS Outlet
81-21227	Repair Kit

Suttner Trigger Guns

High pressure and fatigue free "relax action" design.



- **PSI: 5000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21 oz

ST-2605

Part No.	Description
4-01223	ST-2605
84-202300490	Unitized Valve

Extreme durability with easy pull trigger.



- **PSI: 5000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21 oz

ST-2305

Part No.	Description
4-01922	ST-2305
352239	ST-2300 w/ Weep (4500 PSI)
84-202300490	Unitized Valve
089851	Unitized Weep Valve

The handle style for "Big Hands".



- **PSI: 4000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 26 oz

ST-2000

Part No.	Description
4-01203	ST-2000
84-202000044	Unitized Valve
089631	Unitized Weep Valve

The perennial favorite for general pressure washer applications.



- **PSI: 4000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20.5 oz

ST-1500

Part No.	Description
4-01205	ST-1500
352236	ST-1500 w/ Weep
84-202000044	Unitized Valve
089631	Unitized Weep Valve

Suttner Trigger Guns (continued)

15° offset angle thru gun for easier overhead use.



- **PSI: 4000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 23 oz

ST-601

Part No.	Description
4-01204	ST-601
84-202000044	Unitized Valve

Relax action design, **STAINLESS STEEL** gun.



- **PSI: 5000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21 oz

ST-2700

Part No.	Description
4-01224	ST-2700
84-202700490	Unitized Valve

Excellent for truck and fleet washing applications



- **PSI: 2000**
- **GPM:** 8
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: .82 lb

ST-810 POM

Part No.	Description
352210P	ST-810 POM

J.E. Adams Trigger Gun



Vented handle for Cooler Operation.



- **PSI: 4500**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 25.64 oz

5030NP

Part No.	Description
85-5030	Adams 5030NP
85-5044	Repair Kit

MV 950 Gun



- **PSI: 4500**
- **GPM:** 8
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

Part No.	Description
353045	Model 950
110030	Valve Kit

PA Trigger Guns



Good Solid Heavy-duty Trigger Gun.



- **PSI: 5000**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 26 oz

RL30 – YG5000

Part No.	Description
4-01211	RL30-YG5000
111976	Repair Kit

Good Solid Heavy-duty Trigger Gun.



- **PSI: 5000**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 27.5 oz

Vega 5000

Part No.	Description
352222-5	Vega 5000
352222W	Vega Weep Gun
110550	Valve Kit Vega
110574	Weep Valve Kit Vega
111950	Repair Kit

Easy Hold Trigger, Stainless Steel Compensating.



- **PSI: 6400**
- **GPM:** 10.5
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 30 oz

Orange Nova

Part No.	Description
353223	Orange Nova SS Gun
111980	Repair Kit Orange Nova

Easy pull and easy to hold with matching blue lance.



- **PSI: 5650**
- **GPM:** 8
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" BSP outlet
- Weight: 23.3 oz
- Blue vent grip, stainless steel lance has 1/4" BSP threads

RL-55 Blue & Lance

Part No.	Description
4-01219	Gun/Lance Assembly
353250	RL-55 Blue Gun
368440PB	40" SS Lance w/ Blue Vent Grip
111814	Repair Kit- RL-55

PA Trigger Guns (continued)



- **PSI: 3200**
- **GPM:** 8
- **Temperature:** 320°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 10 oz

RL20

Part No.	Description
353207	RL20
109993	Repair Kit

MV Hobby Wash Gun



Excellent Light-duty gun.



- **PSI: 1850**
- **GPM:** 5
- **Temperature:** 180°F
- 1/4" M inlet x 1/4" F outlet
- Weight: 8.4 oz

Hobby Wash Gun

Part No.	Description
353040	Hobby Wash Gun

Arrowline Guns



Easy Pull, Easy Hold!



- **PSI: 5000**
- **GPM:** 8
- **Temperature:** 302°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

AL 35

Part No.	Description
353110	AL 35 - Blue
353111	AL 35 - Yellow
AL016650016	Repair Kit

Easy pull trigger.



- **PSI: 4500**
- **GPM:** 8
- **Temperature:** 302°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 20 oz

AL 19

Part No.	Description
353105	AL 19
AL016650016	Repair Kit



- **PSI: 4060**
- **GPM:** 10.5
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 25 oz

AL 5

Part No.	Description
353100	AL 5
AL01165006	Repair Kit

GUNS & LANCES

Big Guns



- **PSI: 1800**
- **GPM:** 26.5
- **Temperature:** 300°F
- 1/2" FPT inlet / outlet
- Weight: 59.2 oz



Model 100 "Big Brown Gun"



- **PSI: 3200**
- **GPM:** 42
- **Temperature:** 210°F
- 1/2" FPT inlet / outlet
- Weight: 60.3 oz



Model 160 "Big Blue Gun"

Part No.	Description
353245	Model 100
109775	Repair Kit - Model 100
353260	Model 160
111900	Repair Kit - Model 160



- **PSI: 8100**
- **GPM:** 21
- **Temperature:** 210°F
- 1/2" SS FPT inlet / outlet
- Weight: 60.3 oz



Model 80 "Big Black Gun"



- **PSI: 7250**
- **GPM:** 26
- **Temperature:** 300°F
- 1/2" plated steel FPT inlet / outlet
- Weight: 42.5 oz



ST-3002 Stainless Steel Gun

Part No.	Description
353246	Model 80
109825	Repair Kit
352223	ST-3002
089876	Repair Kit (Includes Seal Kit)
089875	Seal Kit

Big Stainless Steel Lances & Side Handles

For big guns shown above.



- **PSI: 7200**
- **Temperature:** 300°F

- High pressure stainless steel pipe
- Complete with adjustable handle & coupler for 1/4" MPT nozzle
- 1/2" MPT gun connection
- Schedule 80 pipe

Open Guns

Just plain comfortable!



- **PSI: 4500**
- **GPM:** 12
- **Temperature:** 302°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 21.5 oz

Part No.	Description
352602	12 GPM Open Gun

Durable Glass Reinforced Handle.



- **PSI: 4000**
- **GPM:** 12
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Tubular Flow-Thru internals for high pressure and efficiency
- Weight: 16.7 oz

Part No.	Description
352600	Legacy AP1000 Open Gun

Open Guns (continued)



- **PSI: 4000**
- **GPM:** 7
- **Temperature:** 300°F
- 3/8" FPT inlet x 1/4" FPT outlet
- Weight: 12.2 oz

Part No.	Description
353050	AP740 Open Gun

Flow Thru Guns



"Slim" Grip

"Full" Grip

- Pistol grip gun handle
- Cushion grip - red or black
- Tough polyurethane insulation
- Full grip or slim line handle (See specs below)

Part No.	Description
352605	Full Red Grip 3/8" FPT x 1/4" FPT
352606	Full Black Grip 3/8" FPT x 1/4" FPT

Gun Handle w/ 18" Lance

352614	Slim Red Grip 1/4" M x 1/4" F
352616	Full Black Grip 3/8" F x 1/4" M

Landa Variable Pressure Lances

The Landa Stainless Steel Variable pressure lance simply out classes the competition. 41" length to meet ETL Standards plus 1/4" stainless steel tubes provide superior look and durability. Designed specifically for Landa to our specifications



- 4-011143A with coupler shown
- 1/4" stainless or zinc plated tubes
- Fully insulated
- New improved brass valve body and Stainless Steel valve bushing



Part No.	Description
4-011143A	Stainless Steel w/ Coupler
4-0111391	Stainless Steel Lance Only
4-0111351A	Zinc Plated w/ Coupler
83-SSVPKIT	Repair Kit

Insulated Lances

Landa Quality through and through. Superior heat protection with stainless steel tube construction. Available in stainless steel and zinc plated with vented grips or with molded plastic grip as shown below



- 4-0111021 35.5" lance with vented grip and coupler, stainless steel shown
- Vented insulated grip

Part No.	Length	Description
4-0111021	35.5"	Vented Grip w/ Coupler, SS
4-01114230	35.5"	Vented Grip, SS, Lance only
4-011062	72"	Plated, Vented Grip w/ Coupler
4-0111427	72"	Plated, Vented Grip, Lance only

AP Dump Gun



Water continues to run through the tube even when trigger gun is closed.



AP Single Lance Dump Gun

- **PSI: 3000**
- **GPM: 10.5**
- **Temperature: 140°F**
- 3/8" FPT inlet x 1/8" FPT outlet

Part No.	Description
352810	Dump Gun 16" Lance
352812	Dump Gun 40" Lance
109905	Repair Kit

Steam Lance

Designed for use with the Landa Hot 3-300 Steamer unit. Completely insulated for maximum protection



- 4-01111 lance with steam nozzle shown
- Vented grip full length of lance

Part No.	Description
4-01111	48" w/ Steam Nozzle
4-01110	48" w/o Steam Nozzle

Cold Water Lances

Made of 304 Stainless Steel for long lasting durability. As shown below, the 4-0110410 31" lance also has a high-ly visible yellow safety cover and coupler



- High visibility yellow protective cover
- Stainless steel 1/4" pipe

Part No.	Description
4-0110410	31" Covered w/ Coupler

Dump Gun

Industrial duty dual-barrel.



Dual Lance Dump Gun

- **PSI: 3000**
- **GPM: 10**
- **Temperature: 200°F**
- 3/8" FPT inlet x 1/8" FPT outlet

Part No.	Description
352820	Dump Gun w/ 36" Lance
075296	Repair Kits

AL Dual Lances

Premium lance with stainless steel inserted seat.



AL Premium Dual Lance

- **PSI:** 3600
- **GPM:** 10.5
- **Temperature:** 302°F
- 1/4" tubing
- Vented grip
- 1/4" male inlet - female outlet



AL Basic Dual Lance

- **PSI:** 3600
- **GPM:** 10.5
- **Temperature:** 302°F
- 1/4" male inlet - female outlet
- 1/8" Zinc plated tubes
- Square molded grip inlet

Part No.	Description
368925	Stainless Steel Pipe
368925Z	Zinc Plated Pipe
AL8355VPKIT	Repair Kit
368927	Basic Dual Lance
AL004650300	Repair Kit

Dual Lances



Interpump Dual Lance

- **PSI:** 3000
- **GPM:** 10
- **Temperature:** 220°F
- Excellent for down stream injector
- Zinc-plated for chemical resistance
- Brass & stainless steel valve w/ Viton seals
- Side handle valve adjustment

Part No.	Description
4-011139	36" Standard
4-0111412	72" Extended
4-011142A*	36" Deluxe Standard
4-0111421*	72" Deluxe Extended
1-VPKIT	Valve Repair Kit

*Deluxe Lances

Include Hardened Steel QC Inlet Plug, Soap Nozzle and Top Quality Quick Coupler. See lances with deluxe noted above.



Suttner Push & Pull Lance



(Pictured in "pull" 90° position)

- **PSI:** 3050
- **Temperature:** 300°F
- 1/4" MPT inlet
- 1/4" MPT outlet
- Vented grip can be pushed and pulled to make 90 degrees
- Each desired angle remains stationary until adjusted
- Cleans hard to reach areas easier, saving time

Part No.	Description
368880	ST-85 Push & Pull Lance

Suttner Dual Lances



ST-54 w/ Side Handle



ST-53 w/ Knob

- **PSI:** 4000
- **GPM:** 10
- **Temperature:** 300°F
- Zinc / chromate finish
- 38" total length
- Molded grip
- High pressure thin wall tubing
- Weight: 42 oz

Part No.	Description
368153	ST-53 with Knob (4000 PSI)
368154	ST-54 with Side Handle (4500 PSI)
086884	Repair Kit (ST-53)
086883X	Clamp Kit (ST-53/54)
086907	Repair Kit (ST-54)

Dual Trigger Lance

Unique Design – Go from High Pressure to Low Pressure (Rinse to Soap) with a pull of the trigger. Use with separate Trigger Gun or as an Open Gun, and still change from High to Low.



- **PSI:** 3600
- **GPM:** 12
- **Temperature:** 300°F
- Zinc-plated steel tubes
- Stainless steel seat
- Includes nozzle protector
- Weight: 39 oz

Part No.	Description
368158	48" Dual Trigger Lance
109490	Seal Kit

Legacy Superlite SS Dual Lance



Superlite stainless steel with nozzle guard.



- **PSI:** 4000
- **Temperature:** 200°F
- Side handle/ Valve actuator
- Viton seal
- Forged brass valve body
- 1/4" MPT inlet
- 1/8" SS outlet tubing

Part No.	Description
368160	36" - 37.8 oz
368165	72" - 56.0 oz
109490	Seal Kit

PA Insulated Molded Grip Lances Round Daisy Grip



- **PSI:** 4000
- **Temperature:** 300°F
- Zinc-plated high pressure tubing
- Glass-filled polyamide grips
- 1/4" MPT both ends
- Round daisy grip
- Better heat dispersion
- Reduced weight

Part No.	Length	Description
368712PA	12"	Single Grip
368720PA	20"	Single Grip
368724PA	24"	Single Grip
368728PA	28"	Single Grip
368736PA	36"	Single Grip
368748PA	48"	Double Grip
368760PA	60"	Double Grip
368778PA	79"	Triple Grip

NOTE: For 15° bend at Lance Discharge, Place "BND" at end of Part Number

AP Uninsulated Lances



Stainless steel or corrosion-resistant bright zinc-plated lances made with 1/4" tubing.



- **PSI:** 4100
- **Temperature:** 300°F
- Superior strength rolled threads
- 1/4" high pressure, lightweight, thin wall tubing

Part No.	Length	Description
Stainless Steel		
368212	12"	
368220	20"	
368224	24"	
368228	28"	
368236	36"	
368248	48"	
368260	60"	
368278	78"	
Zinc-plated		
368312	12"	
368320	20"	
368324	24"	
368336	36"	
368348	48"	
368360	60"	
368378	78"	

NOTE: For 15° bend at Lance Discharge, Place "BND" at end of Part Number

Square Molded Grip Lances



- **PSI:** 4500
- **Temperature:** 300°F
- Polyamide square grip
- 1/4" MPT both ends
- Bright Zinc-plated Steel

Part No.	Straight Length
368712A	12"
368720A	20"
368724A	24"
368728A	28"
368736A	36"
368748A	48"
368760A	60"
368779A	79"

AP Lances w/ Oval Grips



10% Lighter weight reduces operator fatigue. Stainless steel or Zinc-Plated.



- **PSI:** 4100
- **Temperature:** 300°F
- Superior strength rolled threads
- 1/4" high pressure, lightweight, thin wall tubing
- 1/4" MPT both ends
- Tough glass-filled polyamide
- Molded-on solid oval

Part No.	Length	Description
Stainless Steel		
368412	12"	Single Grip
368420	20"	Single Grip
368424	24"	Single Grip
368428	28"	Single Grip
368436	36"	Single Grip
368448	48"	Double Grip
368460	60"	Double Grip
368479	79"	Double Grip
Zinc-plated		
368712M	12"	Single Grip
368720M	20"	Single Grip
368724M	24"	Single Grip
368728M	28"	Single Grip
368736M	36"	Single Grip
368748M	48"	Double Grip
368760M	60"	Double Grip
368779M	79"	Double Grip

NOTE: For 15° bend at Lance Discharge, Place "BND" at end of Part Number

Suttner Solid Insulated Molded Grip Lances



- **PSI:** 5800
- Glass-Filled Polyamide Grip
- Zinc-Plated High Pressure Steel Tubing
- 1/4" MPT Both Ends

Part No.	Length
368712	12"
368724	24"
368736	36"
368748	48"
368760	60"
368779	79"

NOTE: For 15° bend at Lance Discharge, Place "BND" at end of Part Number

Super Value Vent Grip Lances

Stainless steel or zinc-plated lances with 1/4" inlet/outlet.



- **PSI:** 4100
- **Temperature:** 300°F
- Tough, reusable molded nylon vented handles for heat dissipation
- Heat venting hollow insulators
- 1/4" nozzle protector INCLUDED
- 1/4" male inlet – female outlet

Part No.	Length	Description
Stainless Steel		
368820SS	20"	Single Grip
368824SS	24"	Single Grip
368836SS	36"	Single Grip
368848SS	48"	Double Grip
368860SS	60"	Double Grip
368879SS	79"	Double Grip

Part No.	Length	Description
Zinc-plated		
368820M	20"	Single Grip
368824M	24"	Single Grip
368836M	36"	Single Grip
368848M	48"	Double Grip
368860M	60"	Double Grip
368879M	79"	Double Grip

NOTE: For 15° bend at Lance Discharge, Place "BND" at end of Part Number

MV Lance Handle



- Use on all 1/4" lances
- Easily positioned without removal of nozzle

Part No.	Description
109873	1/4" Lance Handle

Lance Handles / Accessories

Vented Grip, Side Handle with Nut and Vented Grip with Side Handle can be user-attached to Uninsulated Lances or 1/4" Steel Pipe – Detachable & Reusable.



AP	Description
368909P	Vent Grip Only (14" long)
368909PS	Grip with Side Handle
368920P	Side Handle with Nut

SUTTNER	Description
368909	Vent Grip Only (14" long) ST-9
368911	Grip with Side Handle
4-01207	Side Handle with Nut

Spray-Flex™ Flex Wand

Gives easy access to difficult spots, great for cleaning engines, roofs, eaves or underneath almost anything! Holds its' shape under pressure.



- **PSI:** 3000 or 5000
- **Temperature:** 190°F
- 90° flexibility

Part No.	Description
4-01109	Spray-Flex™ Flex Wand - 3000 PSI
368116	Spray-Flex™ Flex Wand - 5000 PSI

Flex Lances


Flexes a full 180° and returns, saving broken wand repairs.



- **PSI:** 2000
- **Temperature:** 200°F
- Prevents bent lances & broken hoses
- Industrial grade polyurethane flex section
- Perfect for self-serve carwash bays
- 1/4" galvanized pipe end sections

Part No.	Description
368118	18" Red, 1/4" MPT x 1/4" MPT
368121	21" Red, 1/4" MPT x 1/8" FPT
368124	24" Red, 1/4" MPT x 1/8" FPT

Telescoping Lances

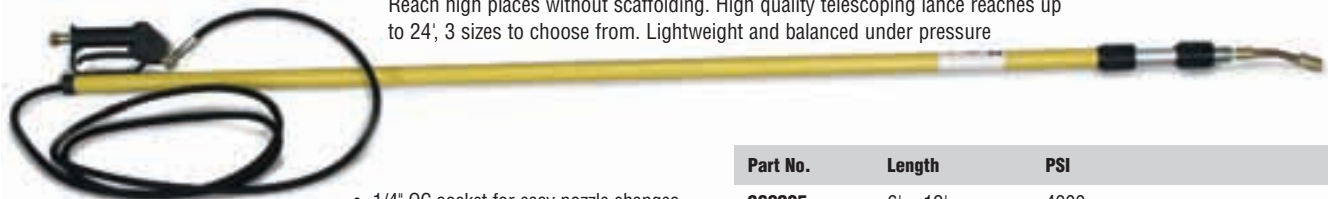


Reach high places without scaffolding. High quality telescoping lance reaches up to 24', 3 sizes to choose from. Lightweight and balanced under pressure

- **PSI:** 3000, Optional: 4000
- **Temperature:** 200°F
- Safe & convenient – cuts cleaning time by 50%
- Easily adjusted for desired lengths
- Lightweight & balanced under pressure

- 1/4" QC socket for easy nozzle changes
- 3/8" QC plug on trigger gun inlet
- Reinforced guns are bolted to lance
- AP 2000 Gun (353020) on 3000 PSI models

Part No.	Length	PSI
368095	6' – 12'	4000
368096	6' – 18'	4000
368097	8' – 24'	4000

Fiberglass Telescoping Lances

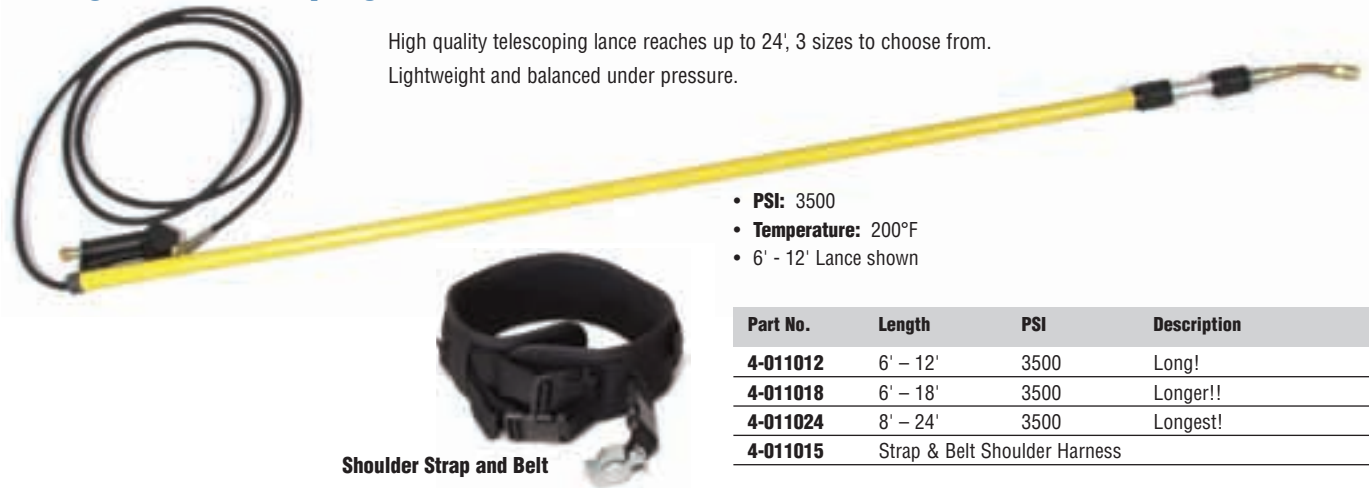

High quality telescoping lance reaches up to 24', 3 sizes to choose from. Lightweight and balanced under pressure.

- **PSI:** 3500
- **Temperature:** 200°F
- 6' - 12' Lance shown

Shoulder Strap and Belt

Part No.	Length	PSI	Description
4-011012	6' – 12'	3500	Long!
4-011018	6' – 18'	3500	Longer!!
4-011024	8' – 24'	3500	Longest!
4-011015	Strap & Belt Shoulder Harness		

Hobby Gun, Lance & Hose

Don't turn away hobby unit owners. Complete replacement hose, gun and lance!



Part No.	Description
4-011137	Insulated Lance w/ Gun
4-011106	Lance w/ Coupler (Not Shown)
4-011105	Lance w/ #3 Hi/Low Varifan Nozzle
4-02010025M	1/4" x 25' Thermoplastic Hose, 22mm both ends

NOTE: See page 40 for more Hobby Hoses

X-Jet Long Range Nozzle



360103

- Projects water and chemical up to 40'
- Chemicals bypass pump, lance, hose and gun for damage protection
- Includes 15' hose with inline shut-off valve and color coded proportioners

Part No.	Description	PSI
360103	X-Jet Long Range Nozzle	2000-3000
360104	X-Jet Long Range Nozzle	3000-4000
360102	M5 X-Jet Variable Fan Long Range Nozzle	2000-3000

Kew Replacement Accessories



- **PSI: 4000**
- **GPM: 10.5**
- **Temperature: 300°F**
- 3/8" F inlet
- Bayonet Quick Coupler Outlet

Iride Kew Style

Part No.	Description
353065	Iride Kew Style
109950	Unitized Valve
109960	Trigger Seal Kit



Bayonet Plug

- 416 Stainless Steel Plug attaches any 1/4" lance to Kew Guns

Part No.	Description
373068	SS Plug
373069	SS Plug w/ set back threads

Replacement Accessories



- **PSI: 4000**
- **Temperature: 300°F**
- M22 - 1 "O" Ring inlet (Standard)
- M22 - 2 "O" Ring outlet (Extended)



Astra Style

Iride Style

Part No.	Description
353070	Astra Style, 10.5 GPM
353075	Iride Style, 8 GPM
Maintenance Kits	
109950	Unitized Valve
109960	Trigger Seal Kit

Tip Retainer

Fits vent grip lance and other nozzles.



Tip Retainer

- 18mm Thread
- Fits vent grip lance & other nozzles
- See tip jet nozzles in nozzle section

Part No.	Description
373065	Tip Retainer



Extended Twist Seal Coupler

- **PSI: 3600**
- **GPM: 11**
- **Temperature: 300°F**
- Double O-ring Seal
- Machined Brass Body
- High Impact Plastic Knob

Part No.	Description
331215	Coupler 1/4" FPT x 22mmF
331315	Plug 1/4" FPT x 22mmM

Tip-Jet Nozzle System



Tip-Jet Tips

- **PSI: to 4000**
- Neat & simple tip change
- Hardened stainless steel tips with vanes
- Strainers available
- Body components available in brass, zinc-plated steel or stainless steel

"Tip-Jet" Nozzle Systems are versatile nozzling systems for everyday or specialized applications.

Nozzle Size	0°	15°	25°	40°
3.0	253316	253317N	253318	—
4.0	253330	253331	253332	253333
4.5	253338	253339	253340	253341
5.0	253346	253348	253349	253350
5.5	253355	253357	253358	253359
6.0	253365	253367	253368	253369

Nozzle Size	0°	15°	25°	40°
6.5	253375	—	253377	253378
7.0	253383	253385	253386	253387
7.5	253392	253393	253394	253395
8.0	253400	253401	253402	253403
9.0	253415	253416	253417	253418
10.0	253456	253457	253458	253459

See page 62 for other Tip-Jet components