

Landa Tuff-Skin™ Hose




For use with: hot or cold-water pressure Washer

There is no other high-pressure hose as tough as Landa's Tuff-Skin™ hose. When tested to ISO 6945 / DIN 20024, the Tuff-Skin has proven to be seven times more abrasion resistant than standard pressure washer hoses yet is 20% more flexible. The Tuff-Skin, with its unique design, has been engineered for a greater continuous temperature range—from -40° to 275°F / 310°F intermittent—and for handling pressures of up to 6000 PSI.

Beside its maximum-strength Class A ORS (Oil Resistance Standard)—most other brands are Class B—the Tuff-Skin has a “bite-the-wire” coupling that grips the hose better than any other design.

Both single- and double-wire braid hoses come with Landa branded durable plastic sleeves on both ends—a 24-inch sleeve on the gun end—for added operator protection against high-pressure bursts.

- **Greater Oil Resistance:** Both the tube and the cover carry the maximum Class A ORS (Oil Resistance Standard) for longer life. Most brands of hose carry only a Class B rating.
- **Higher Temperature Rating:** Tuff-Skin hoses are rated for continuous temperatures up to 275°F / 310°F intermittent—20-30% higher than other brands.
- **Special Wire Braid:** Unique design of braid gives Tuff-Skin hose added durability, greater working pressure and higher impulse cycle in both the double- and single-wire products.
- **Easily Identified:** Permanently embossed identification makes for easy tracing and owner protection.



- **Certified Burst Protection:** Tuff-Skin meets the stringent UL-1776 safety standards with two hose guards—including a 24-inch sleeve on the gun end—for added operator protection against bursts.
- **Higher Abrasion Resistance:** The Tuff-Skin cover has been specially compounded to deliver 7 times the abrasion resistance of other brands.
- **Additional Flexibility:** Even with extra durability, the braid design allows for 20% more flexibility than other brands.
- **Unique Coupling:** A “bite-the-wire” coupling actually reaches the wire braid for never-slip retention, far superior to the “compression” fittings used on conventional hoses.

Tuff-Skin 2-Wire 6000 PSI Hose



- Wrapped impression, maximum oil resistant tube and cover
- LANDA branded yellow hose guard
- 2-wire protection
- Seven times greater abrasion resistance
- Built to SAE 100R2AT OD dimensions
- 3/8" MPT Swivel x 3/8" MPT Solid



Part No.	Size	Temp	PSI
87390710	25' x 3/8" ID	275°F	6000
87390720	50' x 3/8" ID	275°F	6000
87390730	75' x 3/8" ID	275°F	6000
87390740	100' x 3/8" ID	275°F	6000
87390750	150' x 3/8" ID	275°F	6000
4-02063450	50' x 1/2" ID	275°F	5800
4-02063499	100' x 1/2" ID	275°F	5800
4-020434200*	3/8" (bulk hose)	275°F	5800

*400 feet per reel

Tuff-Skin 1-Wire 4000 PSI Hose



- Wrapped impression, maximum oil resistant tube and cover
- LANDA branded black hose guard
- 20% greater flexibility
- Seven times greater abrasion resistance
- Built to SAE 100R1AT OD dimensions
- 3/8" MPT Swivel x 3/8" MPT Solid



Part No.	Size	Temp	PSI
87390250	25' x 3/8" ID	275°F	4000
87390260	50' x 3/8" ID	275°F	4000
87390270	75' x 3/8" ID	275°F	4000
87390280	100' x 3/8" ID	275°F	4000
87390290	150' x 3/8" ID	275°F	4000
4-02053450	50' x 1/2" ID	275°F	3000
4-02053498	100' x 1/2" ID	275°F	3000
4-020334200*	3/8" (bulk hose)	275°F	3000

*500 feet per reel

Landa Tuff-Flex Hose

Tuff-Flex hose has the same durable cover as Tuff-Skin with a smaller outside diameter for greater flexibility!

3/8" Tuff-Flex 2-Wire 5000 PSI Hose

Tuff-Flex hose has the same durable cover as the Tuff-Skin hose. A smaller OD allows for even greater flexibility.



- Yellow Landa branded hose guard
- Wrapped impression, maximum oil resistant tube and cover
- 50% greater flexibility
- Seven times greater abrasion resistance
- Economically priced
- 3/8" MPT Swivel x 3/8" MPT Solid

Part No.	Size	Temp	PSI
87392120	25' x 3/8" ID	275°F	5000
87392130	50' x 3/8" ID	275°F	5000
87392140	75' x 3/8" ID	275°F	5000
87392150	100' x 3/8" ID	275°F	5000
87392160	150' x 3/8" ID	275°F	5000

3/8" Tuff-Flex 1-Wire 3000 PSI Hose

Tuff-Flex hose has the same durable cover as the Tuff-Skin hose. A smaller OD allows for even greater flexibility.



- Black Landa branded hose guard
- Wrapped impression, maximum oil resistant tube and cover
- 50% greater flexibility
- Seven times greater abrasion resistance
- Economically priced
- 3/8" MPT Swivel x 3/8" MPT Solid

Part No.	Size	Temp	PSI
87391330	25' x 3/8" ID	275°F	3000
87391340	50' x 3/8" ID	275°F	3000
87391350	75' x 3/8" ID	275°F	3000
87391360	100' x 3/8" ID	275°F	3000
87391370	150' x 3/8" ID	275°F	3000

3/8" Blue Tuff-Flex 2-Wire 5000 PSI Hose



- Non-marking durable blue cover
- Yellow Landa branded hose guard
- Wrapped impression, maximum oil resistant tube and cover
- 50% greater flexibility
- 3/8" MPT Swivel x 3/8" MPT Solid

Part No.	Size	Temp	PSI
87392170	25' x 3/8" ID	275°F	5000
87392180	50' x 3/8" ID	275°F	5000
87392190	75' x 3/8" ID	275°F	5000
87392200	100' x 3/8" ID	275°F	5000

3/8" Blue Tuff-Flex 1-Wire 3000 PSI Hose



- Non-marking durable blue cover
- Black Landa branded hose guard
- Wrapped impression, maximum oil resistant tube and cover
- 50% greater flexibility
- 3/8" MPT Swivel x 3/8" MPT Solid

Part No.	Size	Temp	PSI
87391380	25' x 3/8" ID	275°F	3000
87391390	50' x 3/8" ID	275°F	3000
87391400	75' x 3/8" ID	275°F	3000
87391410	100' x 3/8" ID	275°F	3000

Industrial Garden Hose



Built to last, extra-large 3/4" ID Inlet water hose. EPDM cover and tube is perfect for water and provides ozone and heat protection.



- EPDM Tube and Cover
- Class C Oil Resistant
- -40°F to 212°F
- Heavy-Duty, contractor grade
- Crush resistant fittings

Part No.	Size	Temp	PSI
4-02140025	25' x 3/4" ID	212°F	200
4-02140050	50' x 3/4" ID	212°F	200
4-02140075	75' x 3/4" ID	212°F	200
4-02140099	100' x 3/4" ID	212°F	200

Sandblast Hose



Heavy-duty spiralite hose available preassembled or by the foot.

- 3/4" spiralite sand hose with air hose locking couplers
- -30°F to 130°F

Part No.	Size: ID	Temp	Description
4-02190000	3/4"	130°F	Sand, Spiralite /ft
4-02199925	3/4" x 25'	130°F	Assy, Sand, Spiralite 25'
4-02199940	3/4" x 40'	130°F	Assy, Sand, Spiralite 40'

Float Tank Inlet Hose



Float tank connection hoses are completely assembled and ready to go. Don't see the size you need? Call us for special orders.



- Pre-made hose with special float fitting already installed
- 3/8" ID Push-on hose
- -40°F to 212°F

Part No.	Size	Temp	PSI
4-02100008	8"	212°F	300
4-02100009	11"	212°F	300
4-02100013	13"	212°F	300
4-02100030	30"	212°F	300
4-02100045	45"	212°F	300
2-30140	Connector, Fluidmaster Ball Cock		

Push-On Hose



This is a fabric braid hose with a Nitrile cover and tube. Easily pushes on to hose barb fitting and good up to 300 PSI.



- Fabric braid
- Nitrile cover
- -40°F to 212°F

Part No.	Size	Temp	PSI
4-02100000	1/4" ID	212°F	300
4-02110000	1/2" ID	212°F	300
4-02120000	3/4" ID	212°F	300

Vinyl Tubing



This 1/4" x 1/2" clear vinyl tubing is heavier duty than the rest! Thick wall resists kinking. Available in clear or clear reinforced with a polyester braid.



- Very flexible
- Available by the foot or 100' rolls

Part No.	Size: ID x OD	PSI	Description
4-02080000	1/4" x 1/2"	50	Clear Vinyl /ft
4-02090000	1/4" x 1/2"	250	Braided Vinyl /ft


1/4", 3/8" & 1/2" 2-Wire Pressure Loop

The 1/4" ID pressure lines swivel at both ends for most any application. The 3/8" ID pressure loops have female JIC on both ends for typical unloader connection hose.



1/4" ID Pressure Line

- 1/4" MPT swivel x 1/4" MPT swivel
- 1/4" ID two-wire 5000 PSI
- Any length available



JIC Pressure Loop

- 1/2" female JIC swivels on each end
- 3/8" ID two-wire 4500 PSI
- Any length available

Part No.	Size	Temp	PSI	Description
4-02021216	16" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02021220	20" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02021226	26" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02021228	28" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02021230	30" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02021236	36" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02021242	42" x 1/4" ID	275°F	5000	1/4" Pressure Line
4-02047716	16" x 3/8" ID	275°F	4500	Pressure Loop
4-02047720	20" x 3/8" ID	275°F	4500	Pressure Loop
4-02047722	22" x 3/8" ID	275°F	4500	Pressure Loop
4-02047725	25" x 3/8" ID	275°F	4500	Pressure Loop
4-02047729	29" x 3/8" ID	275°F	4500	Pressure Loop
4-02047736	36" x 3/8" ID	275°F	4500	Pressure Loop
4-02047738	38" x 3/8" ID	275°F	4500	Pressure Loop
4-02047742	42" x 3/8" ID	275°F	4500	Pressure Loop
4-02067720	20" x 1/2" ID	275°F	4500	Pressure Loop
4-02067722	22" x 1/2" ID	275°F	4500	Pressure Loop
4-02067728	28" x 1/2" ID	275°F	4500	Pressure Loop
4-02067746	46" x 1/2" ID	275°F	4500	Pressure Loop
4-02067770	70" x 1/2" ID	275°F	4500	Pressure Loop


Pulse Hose



- 1300 PSI working pressure
- Available with either plug-end or open flow with solid/swivel connects
- 3/8" MPT on both styles

Part No.	Description
381118	18" with Plug End
381124	24" with Plug End
381128	28" Solid/Swivel - Open
381136	36" Solid/Swivel - Open

Legacy Rawhide Hose

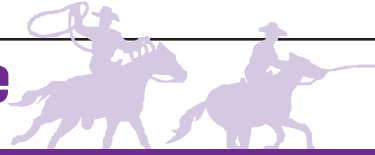

Superior abrasion-resistant cover hose for use with: hot- or cold-water pressure Washer

All standard 3/8" RAWHIDE assemblies include:

- 1 solid end and 1 swivel end
- 8" molded vinyl, color coded bend restrictors (both ends)
- Durable wrapped finish outer cover
- Class A ORS (Oil Resistance Standard) for longer life
- Superior flexibility
- Temperature up to 275°F



Rawhide 1-Wire 4000 PSI Black Hose

Part No.	Size	Temp	PSI	Approx Wt - lbs
3/8" Black Hose				
158265	25' x 3/8" ID	250°F	4000	6.00
158270	30' x 3/8" ID	250°F	4000	7.00
158275	40' x 3/8" ID	250°F	4000	10.00
158280	50' x 3/8" ID	250°F	4000	12.00
158285	75' x 3/8" ID	250°F	4000	17.00
158290	100' x 3/8" ID	250°F	4000	23.00
158295	150' x 3/8" ID	250°F	4000	34.00
158200*	500' x 3/8" ID	250°F	4000	

Rawhide 1-Wire 3000 PSI Blue & Yellow Non-Marking Hose

ANIMAL FAT RESISTANT

Part No.	Size	Temp	PSI	Approx Wt - lbs
3/8" Yellow Hose				
158980	50' x 3/8" ID	250°F	3000	12.00
158985	75' x 3/8" ID	250°F	3000	17.00
158990	100' x 3/8" ID	250°F	3000	23.00
158900*	500' x 3/8" ID	250°F	3000	
3/8" Blue Hose				
158780	50' x 3/8" ID	250°F	3000	12.00
158785	75' x 3/8" ID	250°F	3000	17.00
158790	100' x 3/8" ID	250°F	3000	23.00
158795	150' x 3/8" ID	250°F	3000	34.00
158700*	500' x 3/8" ID	250°F	3000	
1/4" Blue Hose				
158880	50' x 1/4" ID	250°F	3000	8.00
158890	100' x 1/4" ID	250°F	3000	16.00
158800*	500' x 1/4" ID	250°F	3000	

*500 ft reel, 50 ft incremental lengths (max 3 pieces)

Legacy Rawhide 2-Wire 3/8" Hose

All black 2-wire Legacy Rawhide hose is now rated at 6000 PSI!

2-Wire RAWHIDE assemblies include:

- 1 solid end and 1 swivel end
- 6000 PSI rating(5000 PSI on Blue)
- 8" bend restrictors (both ends)
- Durable wrapped finish outer cover
- Superior flexibility
- Beefed up high tensile steel wire braid
- Higher abrasion resistance
- New Temperature up to 275°F



Part No.	Size	Temp	PSI	Approx Wt - lbs
3/8" Black Hose				
159305	25' x 3/8" ID	275°F	6000	9.00
159310	50' x 3/8" ID	275°F	6000	17.00
159315	75' x 3/8" ID	275°F	6000	25.00
159320	100' x 3/8" ID	275°F	6000	33.00
159325	150' x 3/8" ID	275°F	6000	48.00
159300*	500' x 3/8" ID	275°F	6000	
3/8" BLUE Hose				
154415	50' x 3/8" ID	275°F	5000	17.00
154425	100' x 3/8" ID	275°F	5000	33.00

*500 ft reel, 50 ft incremental lengths (max 3 pieces)

Legacy Ultima Hose

Wrapped cover hose with a smaller outside diameter for even greater flexibility!



All standard Ultima assemblies include:

- 1 solid end and 1 swivel end
- 8" molded vinyl color coded bend restrictors (both ends)
- Wrapped impression, maximum oil resistant tube and cover
- 50% greater flexibility
- Temperature up to 275°F

Ultima 1-Wire 3000 PSI Black Hose

Part No.	Size	Approx Wt - lbs
----------	------	-----------------

3/8" Black Hose

153550	15' x 3/8" ID	5.0
153555	25' x 3/8" ID	7.0
153570	50' x 3/8" ID	13.0
153575	75' x 3/8" ID	19.0
153590	100' x 3/8" ID	25.0
153595	150' x 3/8" ID	37.0
153000*	Full Reel	

1/2" Black Hose

155425	25' x 1/2" ID	7.50
155450	50' x 1/2" ID	14.00
155475	75' x 1/2" ID	21.00
155499	100' x 1/2" ID	27.00
155400*	Full Reel	

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

1/4" Black Hose

151025	25' x 1/4" ID	5.00
151030	30' x 1/4" ID	6.00
151050	50' x 1/4" ID	10.00
151075	75' x 1/4" ID	15.00
151090	100' x 1/4" ID	20.00
151000*	Full Reel	

*Full Reel – 700 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

Part No.	Custom Lengths
----------	----------------

3/8" Hose

153000	per ft / hose only
150232*	add fitting(s) and bend restrictor
150205*	add fitting(s) only

1/2" Hose

155400	per ft / hose only
150220*	add fitting(s) and bend restrictor
150222*	add fitting(s) only

1/4" Hose

151000	per ft / hose only
150210*	add fitting(s) and bend restrictor
150212*	add fitting(s) only

*Assembly – Add to cost of custom length (labor & fittings - 1 solid, 1 swivel)

Ultima 2-Wire 5000 PSI Black Hose

Part No.	Size	Approx Wt - lbs
----------	------	-----------------

3/8" Black Hose

154215	15' x 3/8" ID	5.75
154225	25' x 3/8" ID	8.00
154250	50' x 3/8" ID	15.00
154275	75' x 3/8" ID	22.00
154290	100' x 3/8" ID	28.00
154294	150' x 3/8" ID	42.00
154000*	Full Reel	

1/2" Black Hose

155725	25' x 1/2" ID	9.25
155750	50' x 1/2" ID	18.00
155775	75' x 1/2" ID	26.80
155790	100' x 1/2" ID	35.50
155700**	Full Reel	

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

**Full Reel – 330 ft per reel, hose only (max 3 pieces)

Part No.	Custom Lengths
----------	----------------

3/8" Hose

154000	per ft / hose only
150204*	add fitting(s) and bend restrictor
150202*	add fitting(s) only

*Assembly – Add to cost of custom length (labor & fittings - 1 solid, 1 swivel)

1/2" Hose

155700	per ft / hose only
150224*	add fitting(s) and bend restrictor
150222*	add fitting(s) only

*Assembly – Add to cost of custom length (labor & fittings - 1 solid MPT, 1 swivel MPT)

High Pressure Hose



GREAT VALUE! Economically priced 1-wire and 2-wire hose with a durable wrapped cover.



- Temperature: 250°F
- 4 to 1 burst rating
- 3/8" MPT Swivel x 3/8" MPT Solid
- Durable wrapped cover

Part No.	Size	Wire	PSI
----------	------	------	-----

153350	50' x 3/8" ID	1-wire	3000
153390	100' x 3/8" ID	1-wire	3000
153355	50' x 3/8" ID	2-wire	4500
153395	100' x 3/8" ID	2-wire	4500

HOSE & HOSE REELS

Hobby Hose

Replacement hose for most hobby pressure Washer sold by mass retailers.



- Thermoplastic cover
- Fiber-braid reinforcement
- 2250 PSI working pressure
- 9000 PSI burst pressure
- M22 x 1.5 fitting inlet
- 14mm seal cone fits Karcher, Generac & Excell
- 15mm seal cone fits Campbell, MI-T-M

Part No.	Seal Cone	ID	Length
150245	14mm	1/4"	25 ft
150246	15mm	1/4"	25 ft
4-02010025M*	22mm	1/4"	25 ft

NOTE: See Hobby Gun and Lance on page 33.

*Both Ends

Whitewater® Combination Steam Hose



Good up to 3000 PSI / 250°F or 350 PSI / 325°F (1/2" hose 2500 PSI max).



- Single high-tensile steel wire braid
- High temperature bend restrictors – both ends
- Seamless innertube
- Solid 3/8" or 1/2" MPT connectors – both ends (Swivel ends NOT available)
- Oil-resistant cover

Part No.	Size	PSI
3/8" Hose		
153930	30'	up to 3000
153950	50'	up to 3000
153925	25'	up to 3000
153975	75'	up to 3000
153990	100'	up to 3000
153900*	Full Reel	

Part No.	Size	PSI
1/2" Hose		
155625	25'	up to 2500
155650	50'	up to 2500
155675	75'	up to 2500
155690	100'	up to 2500
155600*	Full Reel	

*500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

Part No.	Custom Lengths
3/8" Hose	
153900	per ft / hose only
150215*	add fitting(s) and bend restrictor
150216*	add fitting(s) only

Part No.	Custom Lengths
1/2" Hose	
155600	per ft / hose only
150230*	add fitting(s) and bend restrictor
150228*	add fitting(s) only

*Assembly – Add to cost of custom length (labor & fittings - 2 solid MPT)

Orange 600 & Ribbed PVC Sprayer Hose



Braid reinforced PVC hose designed specifically for AG/ Pest control spraying applications.



- Tough Ribbed Cover
- Color - Orange
- 600 PSI max pressure
- Bulk Hose Standard in 300' Single Length Coils
- Resists Abrasion and UV Rays

Part No.	Length
----------	--------

3/8" Hose - Orange

150630	300' Coil (Single, Uncut Length)
150634	50' Length (Bulk)
150636	100' Length (Bulk)
150632	Per Foot (Minimum 25')

1/2" Hose - Orange

150601	300' Coil (Single, Uncut Length)
150603	50' Length
150606	100' Length
150602	Per Foot (Minimum 25')

3/4" Hose - Orange

150660	300' Coil (Single, Uncut Length)
150662	Per Foot (Minimum 25')

NOTE: All Above Hoses Can Be Custom Fitted – with MPT Fittings, Male or Female Garden Hose Solid or Swivel Fittings, with or without Bend Restrictors, etc. Combinations Are Too Numerous To List – CALL FOR CUSTOM ASSEMBLY PRICING!

Hose Bend Restrictors



- Top quality molded fit bend restrictors
- Fits snugly to prevent kinks near the connectors
- Non-slip sure fit
- Easy installation, 325°F

Part No.	Size	Hose Size/Type	Color/Material
150166	5.3"	1/4" 1 wire	Black Vinyl
150161	6.0"	3/8" 1 wire	Black Vinyl
150164	6.0"	3/8" 2 wire	Red Vinyl
150170	7.0"	1/2" 1 wire	Black Vinyl
150168	7.0"	1/2" 2 wire	Red Vinyl
150174	6.5"	3/8" Combo	Gray Vinyl
150172*	6.5"	1/2" Combo	Black Rubber

*Insulated Rubber

Garden Hose - APEX Quality



- Rated for cold water use
- Reinforced hoses for flexibility & strength in all weather
- Assemblies complete with bend restrictor
- 5/8" or larger ID for full flow
- Commercial grade has machined octagonal "wrench tight" fittings

Part No.	Size	ID	PSI	Color
121315	50'	5/8"	Com	Gray
121319	100'	5/8"	Com	Gray
121332	50'	5/8"	HD	Lt. Green
121336	100'	5/8"	HD	Lt. Green

All Rubber Reinforced Hot Water (160°F) Hose

121344	50'	5/8"	Com	Red
121348	50'	3/4"	Com	Red

Connector Hose - 2' - 10'



Connector hose come with 1 solid / 1 swivel end. NOTE: Add suffix "B" to include 6" bend restrictor.

Part No.	Lengths	Part No.	Lengths
3/8" Ultima - 2 wire 5000 PSI			
154102	2'	154107	7'
154103	3'	154108	8'
154104	4'	154109	9'
154105	5'	154110	10'
154106	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Lengths	Part No.	Lengths
3/8" Ultima - 1 wire 3000 PSI			
153002	2'	153007	7'
153003	3'	153008	8'
153004	4'	153009	9'
153005	5'	153010	10'
153006	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Lengths	Part No.	Lengths
1/2" Ultima - 2 wire 5000 PSI			
155702	2'	155707	7'
155703	3'	155708	8'
155704	4'	155709	9'
155705	5'	155710	10'
155706	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Lengths	Part No.	Lengths
1/4" Ultima - 1 wire 3000 PSI			
151002	2'	151007	7'
151003	3'	151008	8'
151004	4'	151009	9'
151005	5'	151010	10'
151006	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Connector Hose / Carwash Bay Hose - 12' - 25'



All Carwash Bay hose come with Solid Male Pipe on both ends. Add suffix "B" to include bend restrictors on one end. See other options at the bottom of this page.

Part No.	Lengths	Part No.	Lengths
3/8" Ultima - 1 wire 3000 PSI			
261212	12'	261219	19'
261213	13'	261220	20'
261214	14'	261221	21'
261215	15'	261222	22'
261216	16'	261223	23'
261217	17'	261224	24'
261218	18'	261225	25'

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Lengths	Part No.	Lengths
1/4" Apex 3000 - 1 wire 3000 PSI			
261112	12'	261119	19'
261113	13'	261120	20'
261114	14'	261121	21'
261115	15'	261122	22'
261116	16'	261123	23'
261117	17'	261124	24'
261118	18'	261125	25'

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Lengths	Part No.	Lengths
3/8" Blue - 1 wire 3000 PSI			
261312	12'	261319	19'
261313	13'	261320	20'
261314	14'	261321	21'
261315	15'	261322	22'
261316	16'	261323	23'
261317	17'	261324	24'
261318	18'	261325	25'

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Lengths	Part No.	Lengths
1/4" Blue - 1 wire 3000 PSI			
261362	12'	261369	19'
261363	13'	261370	20'
261364	14'	261371	21'
261365	15'	261372	22'
261366	16'	261373	23'
261367	17'	261374	24'
261368	18'	261375	25'

NOTE: Add suffix "B" to include Bend Restrictors

“Field” Attachable Couplings

Design and Build Your Own Hose or Adapt and Repair Hose in the Field (No Crimper Required)



Couplings for 1 Wire Braid Hose

Part No.	ID x MPT	Type
150502	1/4" x 1/4"	Solid
150505	1/4" x 1/4"	Swivel
150510	3/8" x 1/4"	Solid
150511	3/8" x 3/8"	Solid
150513	3/8" x 3/8"	Swivel
150515	1/2" x 3/8"	Solid
150516	1/2" x 1/2"	Solid
150518	1/2" x 1/2"	Swivel

Couplings for 2 Wire Braid Hose

Part No.	ID x MPT	Type
150532	1/4" x 1/4"	Solid
150535	1/4" x 1/4"	Swivel
150540	3/8" x 1/4"	Solid
150541	3/8" x 3/8"	Solid
150543	3/8" x 3/8"	Swivel
150546	1/2" x 1/2"	Solid
150548	1/2" x 1/2"	Swivel

Clear PVC Tubing



- “Box Pak” 100 ft
- 25°F to 150°F
- Very flexible – Non-reinforced
- Packaged in self-dispensing box

Part No.	ID	OD	WP @70°	Roll Length
121070	1/4"	3/8"	55	Box of 100'
121106	1/2"	5/8"	30	Box of 100'

Flex Line Bypass / Supply Line Hose

Industrial PVC hose with black seamless inner tube, polyester braid reinforced tough outer cover. Excellent for use as supply lines or bypass lines. Typically used for air hoses.



- Looks & feels like rubber
- Super flexible
- Smooth dirt- & oil-resistant finish
- Abrasion-resistant cover
- Burst-rated 3 times WP

Part No.	ID x OD	WP @ 70°	Roll Length
Red Cover, heavy wall			
121081	3/8" x .634"	300	50'
121083	3/8" x .634"	300	500'
121087	1/2" x .792"	250	50'
121089	1/2" x .792"	250	500'
121097	3/4" x 1.14"	160	50'
121099	3/4" x 1.14"	160	300'
Black Cover, standard wall			
121143	1/4" x .475"	250	300'
121147	3/8" x .614"	250	100'
121148	3/8" x .614"	250	300'
121153	1/2" x .752"	250	300'
Blue Cover, standard wall			
121160	1/4" x .475"	250	100'
121165	3/8" x .614"	250	100'
121166	3/8" x .614"	250	300'

Clear Vinyl Tubing

LANDA®
CLEANING SYSTEMS



- Also sold in Box of 100 ft
- 25°F to 150°F
- Very flexible – Non-reinforced
- Packaged in self-dispensing box

Part No.	ID	OD	WP @70°	Roll Length
4-02080000	1/4"	1/2"	100	Sold by the Foot, Specify Length

Clear Reinforced PVC Tubing

Multi-use industrial grade tubing with high resistance to chemicals, solvents & fuel.



- Reinforced with polyester cord
- Huge selection of sizes and lengths
- 4 to 1 Burst Safety Factor

Part No.	ID x OD	WP @ 70°	Roll Length
121031	1/4" x 3/8"	25	250'
121032	1/4" x 3/8"	50	250'
121033	1/4" x 3/8"	100	250'
121034	1/4" x 3/8"	300	250'
4-02090000	1/4" x 1/2"		Sold by Foot
121036	3/8" x 1/2"	25	175'
121037	3/8" x 1/2"	50	175'
121038	3/8" x 1/2"	100	175'
121039	3/8" x 1/2"	300	175'
121041	1/2" x 3/4"	25	175'
121042	1/2" x 3/4"	50	175'
121043	1/2" x 3/4"	100	175'
121044	1/2" x 3/4"	300	175'
121046	5/8" x 7/8"	25	140'
121047	5/8" x 7/8"	50	140'
121048	5/8" x 7/8"	100	140'
121049	5/8" x 7/8"	300	140'
121051	3/4" x 1"	25	140'
121052	3/4" x 1"	50	140'
121053	3/4" x 1"	100	140'
121054	3/4" x 1"	300	140'
121059	1" x 1-1/4"	25	75'
121060	1" x 1-1/4"	50	75'
121061	1" x 1-1/4"	100	75'
121063	1" x 1-1/4"	200	75'

Revolutionary 360° Swivel Design

The Rapid Reel Pivot Reel takes the muscle and pain out of fighting high-pressure hoses and keeps them safely stored away from traffic. Featuring a sturdy, lockable, 360° swivel design, the Pivot Reel is always aligned with the hose for tangle-free pressure washing.

The Pivot Reel offers two types of hose reels: pivot and standard (non-pivot).

All are rated at 5000 PSI and 325°F to meet maximum limits of standard 3/8" pressure Washer. Reels carry a two-year warranty.

Pivot Reels have a number of distinctive features, including stainless steel rotor and dual seal swivel, "flip-over" hose guide, spring-action pin to prevent slippage when winding hose and easy-to-engage cam-lever brake.



- **Pivot Design:** Engineered to keep the reel constantly in alignment with the hose for tangle-free washing.
- **Swivel Action:** Designed specifically for pressure Washer with stainless steel rotor and dual seals backed by two-year leak-free guarantee.
- **'Flip-Over' Hose Guide:** For ease in winding and unwinding as well as keeps hands clean and injury free.
- **Slip Protection:** Spring-action, stainless steel pin is quickly engaged or disengaged to prevent slippage during reel operation.
- **Cam-Lever Brake:** Made of durable components, turns on and off with the flick of a finger.
- **Hose Attachment:** Innovative design protects hose from hard pulls so that the strain is absorbed by a cushioned hose clamp.



360° Pivot Reel

Features a sturdy, lockable 360° pivot design. Numerous mounting options. These patented pivot reels are always aligned with the hose for tangle-free pressure washing. Rated at 5000 PSI and 325°F.



Part No.	Length
4-02751030	100' x 3/8"
4-02752030	200' x 3/8"

NOTE: Hose not included

Pivot Mounting Brackets

Select one of the pivot reels above and simply bolt it to any of these brackets or kits.



4-02751031



4-02751036



4-02751032

Part No.	Description
4-02751036	Pivot Reel Wall Mount
4-02751032**	Universal Bracket mount
4-02751031	PHW, OHW, HOT

*Wall stud plate is drilled for 16", 20" and 24" studs. Wall mount bracket is needed for installation with this.

**Universal bracket mounts to any round pipe, square tube or angle iron up to 1-1/2" in size.



Non-Pivot Hose Reels

Versatile line for high-pressure hose. Numerous mounting options. High-pressure reels carry a 2-year warranty and are rated at 5000 PSI and 325°F.



Front View



Non-pivot reels are designed to be bolted to one of the mounting brackets listed under "Non-Pivot Mounting Brackets".

Part No.	Length
4-02751025	100' x 3/8"
4-02751026	200' x 3/8"

NOTE: Hose not included

Non-Pivot Mounting Brackets

Select one of the non-pivot reels and simply bolt it to any of these brackets or kits.



Part No.	Description
368159	Base Mount, Non-Pivot Reel, Wall or Flatbed
4-02751060	Support Arm, 45°, Non-Pivot Reel
4-02751044	Support Arm, 90°, Non-Pivot Reel
4-02751043	Vertical Support Arm, Non-Pivot Reel

Rapid Reel Swivels

Rapid Reel's very own swivel is designed specifically for pressure Washer and is the ONLY swivel guaranteed not to leak for 2 years! A stainless rotor and unique dual seal deliver extra long life.



- 5000 PSI
- Stainless steel rotor
- Unique dual seal for extra long life
- 2 year warranty

Part No.	Description	PSI
4-02751028	Rapid Reel Swivel, 1/2" FPT x 3/8" FPT	5000
4-02751029	Rapid Reel Swivel Repair Kit	

Cox Hose Reels



Cox reels offer high performance in a very compact and lightweight hand crank hose reel. Perfect for mobile application and permanent floor and wall mount.



- Rated up to 4000 PSI
- -20°F to 225°F
- Adjustable drag brake
- 90° brass swivel

Part No.	Description	PSI
4-02750001	175' x 3/8"	3000
4-02750002	50' x 3/8"	4000
4-02750003	100' x 3/8"	4000
4-02750004	100' x 1.5"	600
4-02750008	100' x 1"	300
95-07121213	Mounting Bracket, Horizontal Coil Machines	
4-020362	Replacement Swivel, 1/2"	
4-020363	Replacement Swivel, 3/8"	
4-020368	Swivel Repair Kit	
4-020369	Handle Replacement	
4-020366	Locking Pin Assy	



AP Hose Reels

AP hose reels have been designed to perfectly balance ruggedness and durability with affordability.



Swivel Repair Kits

Part No.

4-0203611

- Flared flanges for maximum capacity
- Solid center core for maximum strength
- Rolled beaded edge flanges for maximum safety
- Easy mounting options for maximum versatility
- "Posi-Pin" lock, prevents unwanted dereeling
- Heavy-duty powder coated steel
- Easy access external swivel
- 4000 PSI working pressure
- Rated temp: 225°F
- 3/8" or 1/2" Inlet/Outlet

Part No.	Hose Dia	Capacity	Core Width	Flange Width	Flange Dia	Overall Height
386188	3/8"	50'	4.3"	7.9"	10.5"	13.0"
4-02755030	3/8"	100'	8.7"	12.2"	10.5"	13.0"
386206	3/8"	150'	6.3"	10.2"	13.0"	16.7"
386209	1/2"	100'	6.3"	10.2"	13.0"	16.7"

NOTE: Hose is not included. See page 41 for connector hoses.

Replacement Swivels

See pages 49-50



Swivel Repair Kits

Part No. Hose Dia.

075130 3/8"

075128 1/2"

110025*

*For Round Swivels

Replacement Swivels

See pages 49-50

- Super-reinforced core – Won't collapse!
- Adjustable brake for controlled reel tension
- Convenient external swivel
- Manual rewind handle included
- Solid core bolts onto flanges for extra strength
- 225°F
- Snap lock to prevent accidental dereeling
- Bearings have oil cap for easy field maintenance
- 4000 PSI working pressure

Professional Size Reel

Part No.	Hose Dia	Capacity	Reel Size Width	Reel Size Dia
386174	3/8"	150'	6"	18"
386175	3/8"	300'	10"	18"
386176	3/8"	350'	14"	18"
386181	1/2"	200'	10"	18"
386182	1/2"	270'	14"	18"

NOTE: Hose is not included. Interchangeable parts available. See page 41 for connector hoses.

Space Saver Reel

Part No.	Hose Dia	Capacity	Reel Size Width	Reel Size Dia
386171	3/8"	90'	6"	14"
386172	3/8"	140'	10"	14"
386173	3/8"	200'	14"	14"
386178	1/2"	115'	10"	14"
386179	1/2"	150'	14"	14"

NOTE: Hose is not included. Interchangeable parts available. See page 41 for connector hoses.